

## Data sheet

## Climatic Chamber KK 750 Smart PRO



The photo above is for reference only, may show additional options not included in standard equipment. The real appearance, particularly color and structure of the material may differ from the ones presented in the photo.

### Advantages of the SMART PRO controller:

- large (7"), clear, full colour touch screen
- LAN, USB ports and WiFi for communication and data transfer
- multi-segment time and temperature programs
- overview of data in tabular and graphic form
- visual and sound alarm
- Admin function for management
- password protected log-in
- internal memory for programs and data storage
- event registry with user notifications
- LabDesk software and user manual for direct download




Smart PRO - preview screen

**TECHNICAL DATA**

air convection	forced
chamber capacity [l]	749
working capacity [l]	749
controller	microprocessor PID
display	7" full colour touch screen

**TEMPERATURE AND HUMIDITY**

temperature range [°C]	0...+60
temperature resolution every ... [°C]	0,1
temperature variation at 25°C and 60%rH [±/°C]*	2,0
relative humidity range [%]	30...90 (see chart for details)
humidity resolution every ... [%]	1,0
humidity variation at 25°C and 60% rH [%rH]	5,0
over temperature protection	class 3.3 to DIN 12880

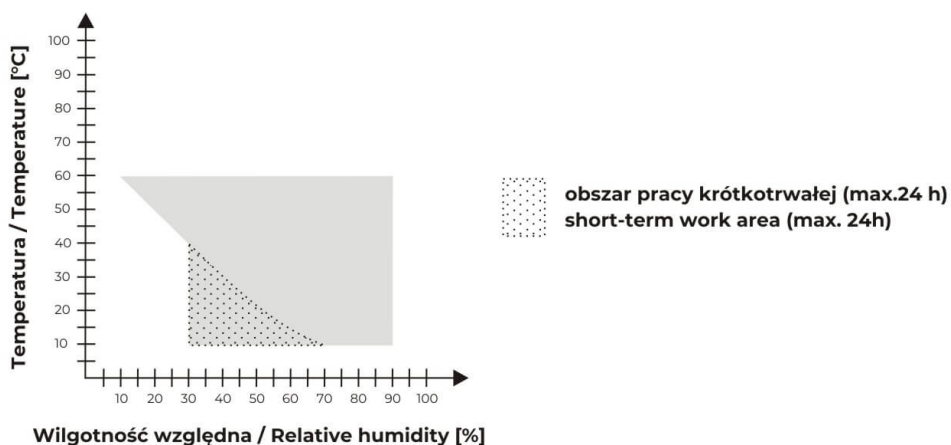
**CHAMBER**


door	double (external solid, internal glass) / external glass (option)
<b>interior</b>	
Smart PRO	acid-proof stainless steel to DIN 1.4301
IG Smart PRO	acid-proof stainless steel to DIN 1.4301
<b>housing</b>	
Smart PRO	powder coated sheet
IG Smart PRO	stainless steel linen finish

**overall dims [mm] /1/**

A width	1270
B height	2010
depth C	1120

**internal dims [mm]**

width D	1040
height E	1200
depth F	600

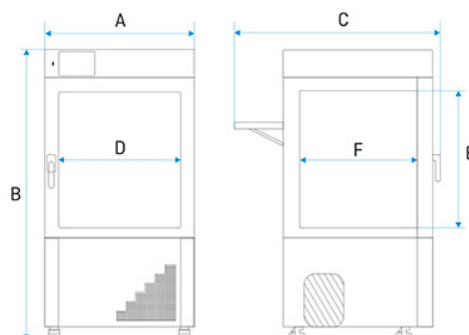

shelves (standard   max)	5   16
- reinforced shelf version (PW) [kg] /3/	100
max unit workload [kg]	140
weight [kg]	275

**ELECTRICAL PARAMETERS**

power supply	230V 50-60Hz
nominal power [W]	2850
refrigerant	R290 / GWP=3
warranty	24 months
manufacturer	POL-EKO-APARATURA

all the above technical data refer to standard units (without optional accessories)

\* - variation (K) calculated for chamber as:  $K = \frac{T_{\text{average max.}} - T_{\text{average min.}}}{2}$

\*\* - other power supplies on request


1 - depth doesn't include 50 mm of power cable

2 - on uniformly loaded surface

3 - reinforced shelf

4 - reinforced version

## OPTIONS AND ACCESSORIES




Order number: \*/A

Door with viewing window




Order number: \*/P INOX

Stainless steel wire shelf INOX




















Order number: \*/PP

Perforated shelf



Order number: \*/PW

Reinforced shelf

	Order number: KUV GN*/*	Stainless steel cuvettes
	Order number: */FIT	Phytotron system
	Order number: FIT/R3	FIT panels independent control
	Order number: GNZ	Internal socket
	Order number: KK/CP	Low water level sensor
	Order number: BRT*/L or IQ/OQ/PQ	Calibration and IQ, OQ, PQ qualification
	Order number: BPP 12	Battery backup for display
	Order number: PORT ALARM	Dry alarm contact
	Order number: USBK	USB cable
	Order number: LANK	LAN cable
	Order number: OCZ/20	Non-standard access port 20 mm
	Order number: OCZ/30	Additional access port 30 mm
	Order number: OCZ/60	Non-standard access port 60 mm
	Order number: OCZ/100	Non-standard access port 100 mm
	Order number: KK/Z	Container for deionised water
	Order number: KD	Access control
	Order number: CCTV	Camera inside the chamber



tel. (+48) 32 453 91 70

e-mail: [info@pol-eko.com.pl](mailto:info@pol-eko.com.pl)  
internet: [www.pol-eko.com.pl](http://www.pol-eko.com.pl)

## POL-EKO-APARATURA SP. J.

A. POŁOK – KOWALSKA, S. KOWALSKI  
44-300 WODZISŁAW ŚLĄSKI, UL. KOKOSZYCKA 172 C



Order number: CCTV CAM

Additional camera